



37" 3000 NITS HIGH BRIGHTNESS BAR TYPE LCD MODEL DS371BT4

The DS371BT4 is a 37.5 inch high brightness stretched professional LCD. With a stretched 32:9 aspect ratio, the DS371BT4 is designed for special applications where height is limited.

A brightness rating of 3000 nits produces a daylight viewable image for high ambient light installations. A local dimming backlight provides incredible, high contrast picture quality and low power consumption.


Screen image simulated.

Key Features

- 3000 nits Brightness
- Integrated Android Media Player
- LED Backlit
- Blackening Defect Free in Direct Sunlight
- 1920 x 540 Resolution
- 5.6 mm / 11.9 mm Bezel Width

37" 3000 NITS HIGH BRIGHTNESS BAR TYPE LCD

MODEL DS371BT4

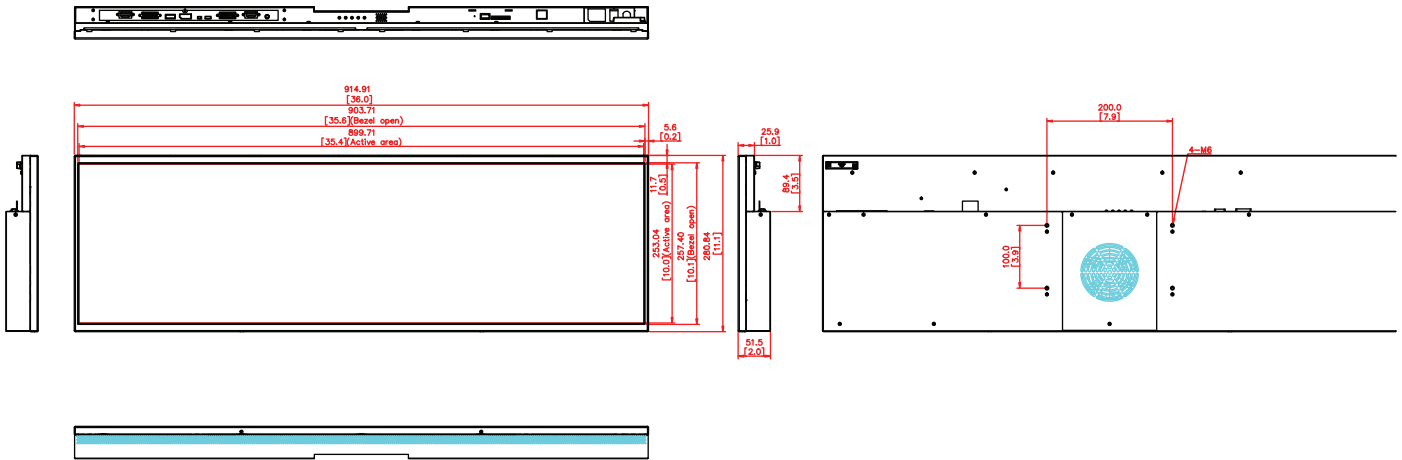

PANEL

LCD Panel Type	37.5 inches IPS LCD
Native Resolution	1920 x 540 (32:9)
Backlight	LED
Brightness	3000 nit
Default Color Temperature	D65 (6500 K)
Contrast Ratio	4,000:1
Color Depth	10 bits
Response Time	16 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
Blackening Defect Free	Up to 110°C (230°F)
Panel Surface	AR, Haze 25%, 3H

POWER

Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power On Mode	95 W (typ), 145 W (max) (TBC)
Power Saving Mode	< 1 W

MECHANICAL SPECS

Bezel Width (T/B/L/R)	5.6/ 5.6/ 11.9/ 11.9mm
Cabinet Color	Black
Dimension (LxHxD, w/o stand)	914.9 x 280.8 x 51.5 mm
Weight (set/package)	9 kg / 12.5kg
VESA Mounting (dimension)	200 x 100 mm
Orientation	Portrait / Landscape

USER INTERFACE

Language	English
Daisy Chain	DVI, RS-232
Proof of Image Retention	Yes
Dimming Control (DCR)	Yes
Built-in Video Wall Support	Up to 15x15
ID Setting for Daisy Chain	Yes
On/Off Scheduling	Yes
Ambient Light Sensor	Yes
Total Turn-on time	Yes
Internal Temperature Sensor	Yes
Network Control	RS-232(IN/Out), RJ45
OSD Menu Rotation	Yes

I/O PORTS (TBC)

DVI-D	In (x1), Out (x1)
Display Port	In (x1)
HDMI	In (x1)
RS-232	In (x1), Out (x1)
RJ-45	In (x1)
Audio	In (x1), Out (x1)
USB	USB2.0 for Internal Player*

ENVIRONMENT

Operating Temperature	0° C ~ 40° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing

INTERNAL PLAYER

Processor	ARM Cortex-A9 1.6 GHz, Quad-Core CPU
On chip cache memory	L2: 512KB
Clock speed	1.6GHz
Main memory interface	1GB DDR3/3L (1600MHz)
Graphics	600M ARM Mali400MP4,2D/3D graphic engine, support OpenGL ES1.1/2.0, Open
Storage (FDM)	8GB NAND Flash(2GB occupied by o/s, 6GB available depending on total capacity)
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263, H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0, SD slot
Operating system	Yes